
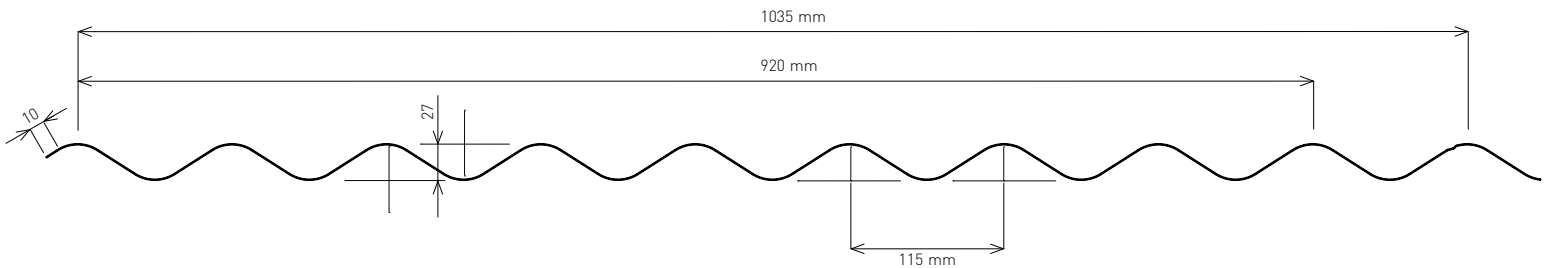


# Chapa perfilada

PERFITEC S27/1035 (920)

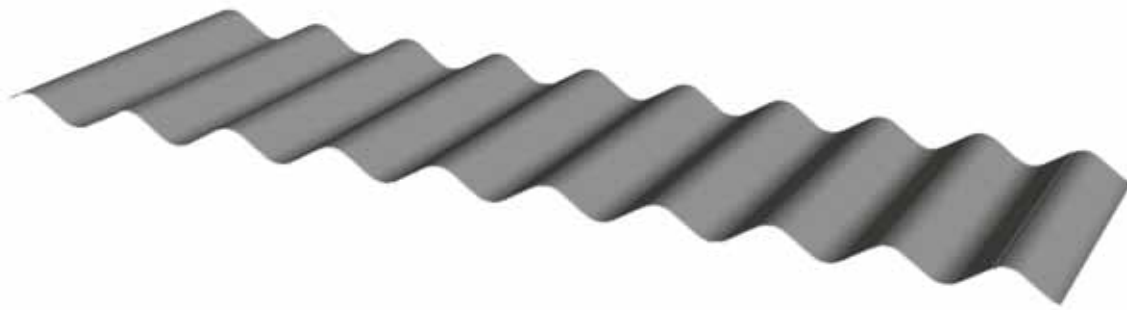

APOIOS		Esp. (mm)	Peso (Kg/m <sup>2</sup> )	Secção (cm <sup>2</sup> )	Inércia (cm <sup>4</sup> )	Flexão W (cm <sup>3</sup> )	ℓ = m	1,00	1,25	1,50	1,75	2,00	2,25	2,50	2,75	3,00
	p	0,5	5,35	6,25	5,15	3,81	p = Kg/m <sup>2</sup>	415	213	123	77	52	36	27	20	-
		0,6	6,42	7,50	6,18	4,58		498	255	148	93	62	44	32	24	18
		0,7	7,49	8,75	7,22	5,35		582	298	173	109	73	51	37	28	22
		0,8	8,56	10,00	8,25	6,11		665	341	197	124	83	58	43	32	25
	p	0,5	5,35	6,25	5,15	3,81	p = Kg/m <sup>2</sup>	717	459	296	186	125	88	64	48	37
		0,6	6,42	7,50	6,18	4,58		861	551	355	224	150	105	77	58	44
		0,7	7,49	8,75	7,22	5,35		1005	643	415	261	175	123	90	67	52
		0,8	8,56	10,00	8,25	6,11		1149	735	474	298	200	140	102	77	59
	p	0,5	5,35	6,25	5,15	3,81	p = Kg/m <sup>2</sup>	808	517	359	264	202	160	129	100	77
		0,6	6,42	7,50	6,18	4,58		969	620	431	316	242	191	155	120	92
		0,7	7,49	8,75	7,22	5,35		1132	725	503	370	283	224	181	140	108
		0,8	8,56	10,00	8,25	6,11		1294	828	575	422	323	256	207	160	123