


12

Chapa de imitação de telha

PERFITEC TJ24/ 1100

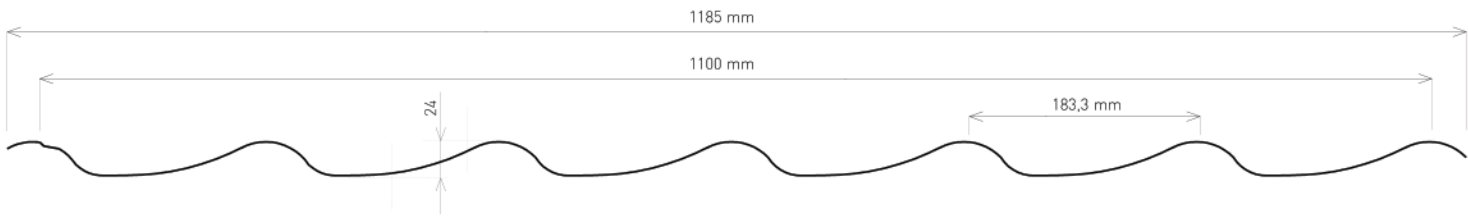

APOIOS	Esp. (mm)	Peso (Kg/m ²)	Secção (cm ²)	Inércia (cm ⁴)	Flexão W (cm ³)	$\ell = m$	0,35	0,70	1,05	1,40
	0,5	4,14	6,26	2,66	1,04	$p = Kg/m^2$	797	199	89	39
	0,6	4,97	7,52	3,22	1,26		969	242	108	47
	0,7	5,79	8,77	3,78	1,49		1142	285	127	56
	0,8	6,63	10,02	4,34	1,72		1316	329	146	64
	0,5	4,14	6,26	2,66	1,04	$p = Kg/m^2$	831	208	92	52
	0,6	4,97	7,52	3,22	1,26		505	252	112	63
	0,7	5,79	8,77	3,78	1,49		1190	297	132	74
	0,8	6,63	10,02	4,34	1,72		1371	343	152	86
	0,5	4,14	6,26	2,66	1,04	$p = Kg/m^2$	898	224	100	56
	0,6	4,97	7,52	3,22	1,26		1091	273	121	68
	0,7	5,79	8,77	3,78	1,49		1286	321	143	80
	0,8	6,63	10,02	4,34	1,72		1482	371	165	93