






Chapa perfilada

PERFITEC TR35/995

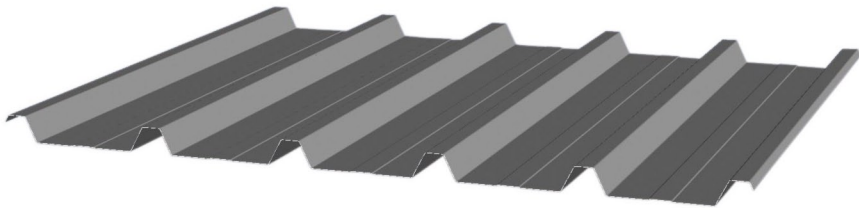

PERFITEC TR35/995 - F

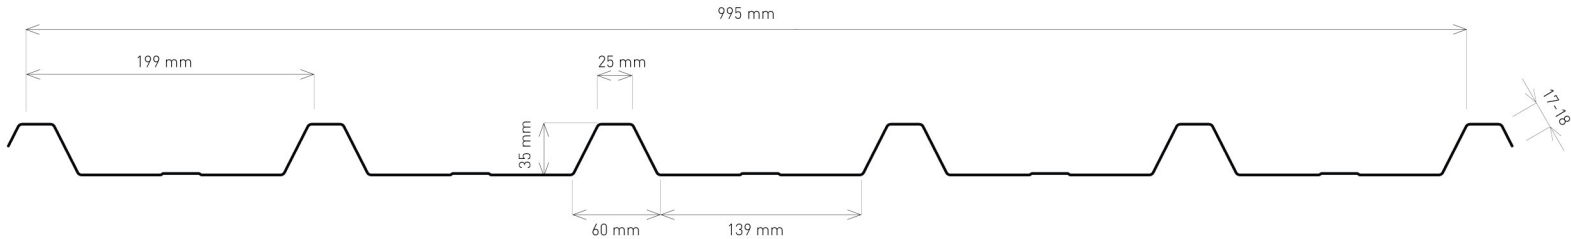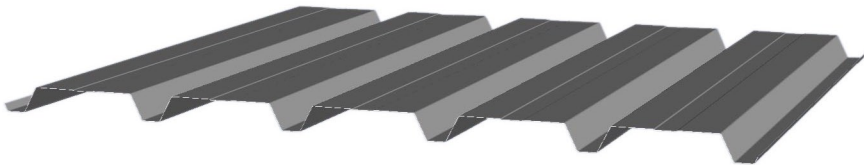

APOIOS	Esp. (mm)	Peso (Kg/m²)	Secção (cm²)	Inércia (cm⁴)	Flexão W (cm³)	ℓ = m	1,00	1,25	1,50	1,75	2,00	2,25	2,50	2,75	3,00
	0,5	4,91	6,34	11,33	4,70	p = Kg/m²	376	241	167	123	94	80	58	44	34
	0,6	5,89	7,61	13,61	5,64		451	289	200	147	113	96	70	53	41
	0,7	6,87	8,88	15,89	6,60		528	338	235	172	132	113	82	62	47
	0,8	7,85	10,15	18,18	7,56		605	387	269	197	151	129	94	70	54
	0,5	4,91	6,34	11,33	4,70	p = Kg/m²	451	289	200	147	113	89	72	60	50
	0,6	5,89	7,61	13,61	5,64		541	346	241	177	135	107	87	72	60
	0,7	6,87	8,88	15,89	6,60		634	405	282	207	158	125	101	84	70
	0,8	7,85	10,15	18,18	7,56		725	464	322	237	181	143	116	96	81
	0,5	4,91	6,34	11,33	4,70	p = Kg/m²	508	325	226	166	127	100	81	67	56
	0,6	5,89	7,61	13,61	5,64		610	390	271	199	152	120	98	81	68
	0,7	6,87	8,88	15,89	6,60		713	457	317	233	178	141	114	94	79
	0,8	7,85	10,15	18,18	7,56		817	523	363	267	204	161	131	108	91