
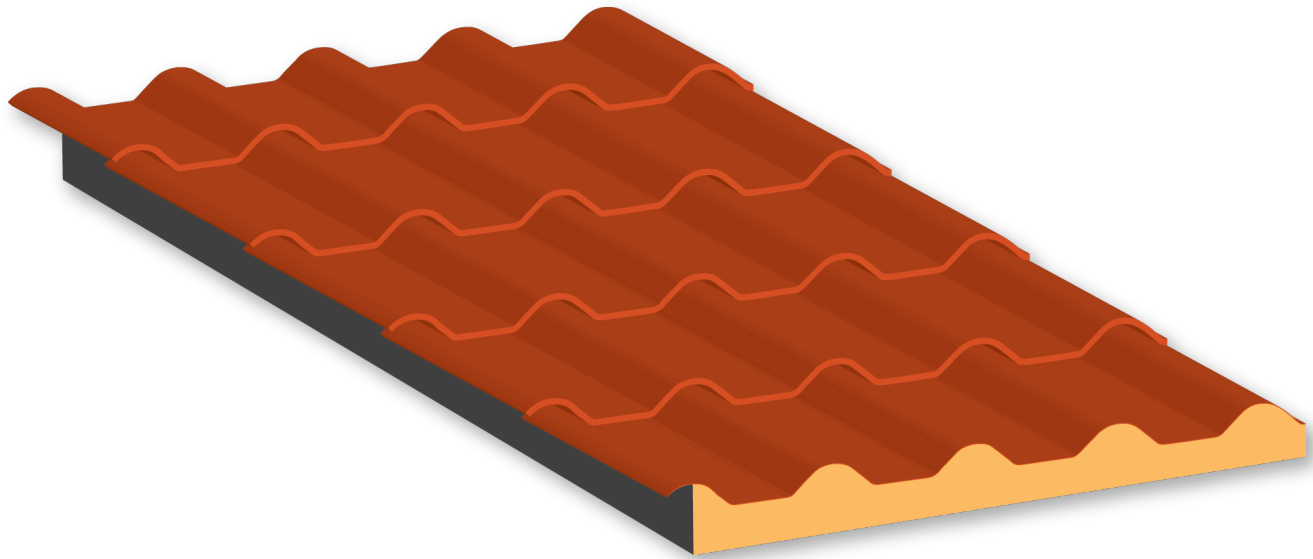


Pormenor de Montagem

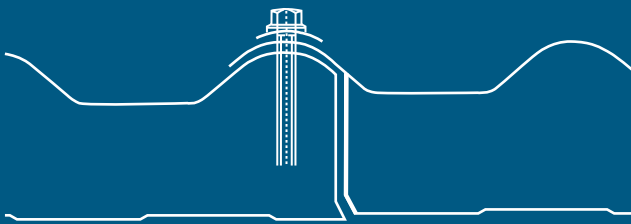

Esquema Estático (quatro apoios)

Cálculo	Espessura	K		Peso Kg/m ²	Distância entre apoios cm							
		Kcal/m ² h °C	Watt/m ² K		105	140	175	210	245	280	315	350
Chapa externa Aço 6/10 mm Chapa interna Aço 5/10 mm	65	0.30	0.34	11.80	500	350	250	180	140	100	80	60
Chapa externa Alumínio 7/10 mm Chapa interna Aço 5/10 mm	65	0.30	0.34	12.55	400	265	185	130	90	65	--	--
Chapa externa Cobre 6/10 mm Chapa interna Aço 5/10 mm	65	0.30	0.34	8.65	450	300	200	150	110	80	60	--