



09

Poliuretano



ROOFTEC - 4

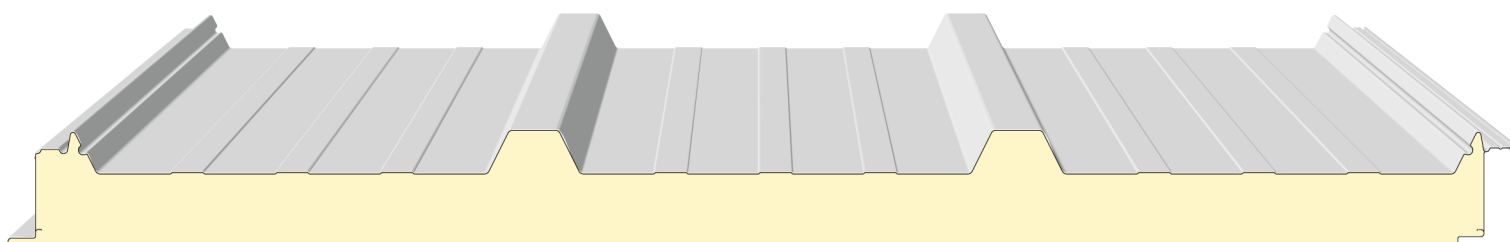

CONDIÇÕES DE CARGA					CARGA ÚTIL UNIFORMEMENTE DISTRIBUIDA EM KG/m ² - KN/m ²												
ESP s mm	K		PESO PAINEL Kg/m ²		U.M.												
	Kcal m ² .h.°C	W m ² .K	0,5+0,4	0,6+0,5		2,00	2,50	3,00	3,50	4,00	4,50	2,00	2,50	3,00	3,50	4,00	4,50
40	0,44	0,51	10,16	11,00	Kg/m ² KN/m ²	166 1,63	125 1,22	90 0,88	70 0,68	55 0,54	40 0,39	178 1,74	140 1,37	108 1,05	85 0,83	70 0,68	58 0,56
50	0,36	0,41	10,58	11,43	Kg/m ² KN/m ²	225 2,21	160 1,57	120 1,18	90 0,88	70 0,68	50 0,49	245 2,41	182 1,78	140 1,37	115 1,13	80 0,78	70 0,68

N.B.: Os valores nesta tabela são para uma flecha $f \leq 1/200$ de vão l (m) e referem-se a painéis com a espessura de chapa de 0,5+0,5mm