
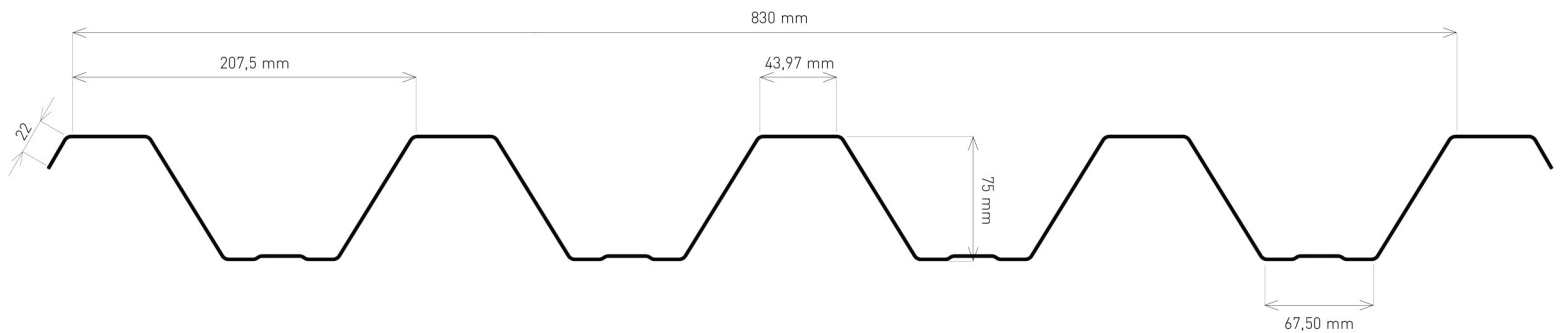


1n

Chapa perfilada autoportante

PERFITEC TR75/ 830

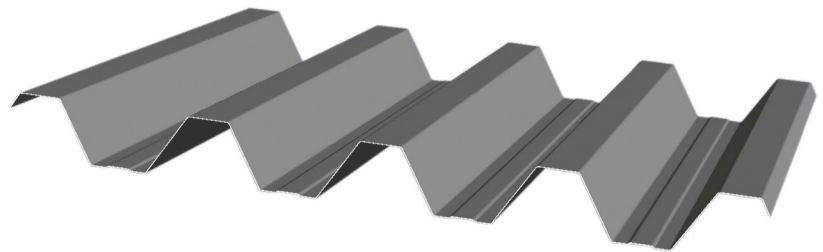

APOIOS	Esp. (mm)	Peso (Kg/m ²)	Secção (cm ²)	Inércia (cm ⁴)	Flexão W (cm ³)	$\ell = m$	2,50	2,75	3,00	3,50	4,00	4,50	5,00	5,50	6,00
	0,6	7,21	7,49	61,91	20,10	$p = Kg/m^2$	320	240	185	116	78	55	40	30	23
	0,8	9,61	9,98	82,49	26,78		426	320	246	155	104	73	53	40	31
	1,0	12,01	12,47	103,10	33,47		532	400	308	194	130	91	67	50	38
	1,2	14,41	14,96	123,71	40,17		638	480	369	233	156	109	80	60	46
	0,6	7,21	7,49	61,91	20,10	$p = Kg/m^2$	605	500	420	280	188	132	96	72	56
	0,8	9,61	9,98	82,49	26,78		806	666	559	373	250	175	128	96	74
	1,0	12,01	12,47	103,10	33,47		1007	832	699	466	312	219	160	120	93
	1,2	14,41	14,96	123,71	40,17		1208	998	839	559	375	263	192	144	111
	0,6	7,21	7,49	61,91	20,10	$p = Kg/m^2$	681	563	473	347	266	210	170	141	116
	0,8	9,61	9,98	82,49	26,78		907	750	630	463	354	280	227	187	154
	1,0	12,01	12,47	103,10	33,47		1134	937	787	579	443	350	283	234	192
	1,2	14,41	14,96	123,71	40,17		1361	1124	945	694	531	420	340	281	231